


## TECHNICAL SPECIFICATION

### 2XS(FL)2Y 1x240RM/50 40/69kV IEC 60840

#### CONSTRUCTION <sup>(x)</sup>

- Round, stranded and compacted copper conductor. Class 2.
- Extruded semi-conducting conductor screen
- Insulation XLPE – dry cured
- Extruded semi-conducting insulation screen
- Semi-conducting swelling tapes
- Metallic screen:
  - copper wires screen and
  - copper equalizing tapes
- Semi-conducting swelling tapes
- Longitudinal aluminum foil
- Sheath – Black HDPE ST7 type

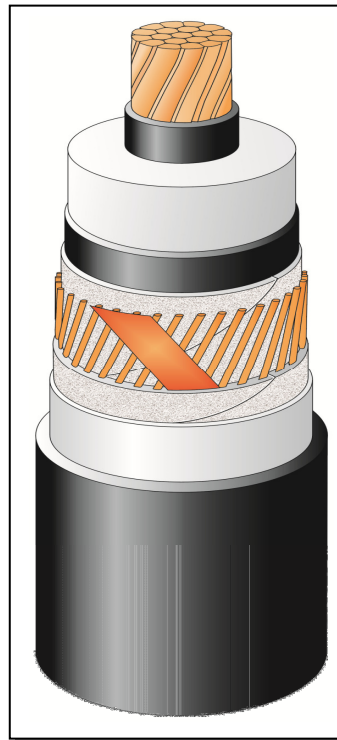

The picture is informative only  
– not in scale

#### APPLICATION

- Laying in ground (wet or dry locations)
- Laying in air
- Laying in ducts

#### Highest permissible conductor temperature

- Continuous operation 90°C
- Overload 105°C
- Short circuit 250°C (duration max 5s)

Laying is possible without any special measures at natural cable temperatures and ambient temperature not lower than -5°C, with Tele-Fonika supervising

#### MARKING

TF KABLE, product name, date of manufacture, standard, meter marking

DESCRIPTION	UNIT	DETAILS	
<b>CONSTRUCTION DATA</b>	<b><math>U_0/U_m</math></b>	<b>40/69 (72,5) kV</b>	
Conductor		Copper	
<input type="checkbox"/> material		60	
<input type="checkbox"/> number of wires	No		
Nominal cross sectional area	mm <sup>2</sup>	240	
Conductor diameter and tolerance	mm	18.5 <sup>+0.3</sup>	
Min./Nom. thickness semi-conducting XLPE on conductor	mm	0.4 / 0.8	
Nominal insulation thickness XLPE	mm	11.0	
Insulation thickness: minimum at a point	mm	9.9	
Diameter over insulation – nominal	mm	42.1 <sup>-0.5 +0.5</sup>	
Min./Nom. thickness semi-conducting XLPE on insulation	mm	0.4 / 0.8	
Thickness of semi-conducting swelling tape	No x mm	1 x ~ 0.35	
Metallic screen	mm <sup>2</sup>	95	
<input type="checkbox"/> Copper wires	No x mm	60 x 1.04	
<input type="checkbox"/> Copper equalizing tape	No x mm x mm	2 x 10 x 0.10	
Mean diameter over metallic screen	mm	46.0	
Thickness of semi-conducting swelling tape	No x mm	1 x ~ 0.35	
Thickness of aluminum foil	mm	0.2	
Diameter over aluminum foil	mm	47.2	
Nominal thickness of outer sheath / min.	mm	2.7 / 2.19	
Approximate overall diameter completed cable (D <sub>c</sub> )	mm	52.8	
Weight of complete cable (approx.)	kg/km	4370	
<b>DELIVERY DATA</b>			
Diameter of wooden drum	m	2.8	2.5
<input type="checkbox"/> type		28AS	25AS
Maximum length per drum	m	1471	1000
Weight of heaviest reel, including cable	kg	7400	5400

<sup>(x)</sup> Diameters are calculated values and subject to manufacturing tolerances

<b>ELECTRICAL DATA at 50Hz</b>		
Maximum D.C. conductor resistance at 20°C	Ω/km	0.0754
Maximum A.C. conductor resistance at 90°C	Ω/km	0.0973
Maximum D.C. metallic screen resistance at 20°C	Ω/km	0.350
Maximum D.C. aluminum foil resistance at 20°C	Ω/km	0.840
Operating inductance		
<input type="checkbox"/> trefoil formation	mH/km	0.400
<input type="checkbox"/> flat formation (*)	mH/km	0.585
Induction reactance		
<input type="checkbox"/> trefoil formation	Ω/km	0.126
<input type="checkbox"/> flat formation (*)	Ω/km	0.184
Capacitance	μF/km	0.180 (+ 8 %)
Capacitance reactance	kΩ/km	17.65
Impedance		
<input type="checkbox"/> trefoil formation	Ω/km	0.159
<input type="checkbox"/> flat formation (*)	Ω/km	0.208
Zero sequence reactance	Ω/km	0.073
Max. electric stress at conductor screen / (at insulation)	kV/mm	5.4 / 2.6
Dielectric losses (tg δ = 0.001) – per phase	W/m	0.091
Partial discharge test – at 1.5U <sub>0</sub>	pC	≤ 5
Charging current – per phase	A/km	2.27
Charging power	kVA/km	91
Earth fault current – per phase	A/km	6.80
<b>MECHANICAL DATA</b>		
Recommended min. bending radius for laying	m	1.32
Recommended permissible bending radius at final installation	m	1.05
Maximum permissible pulling force:	kN	12
<b>SHORT CIRCUIT CURRENTS</b>		
Maximum permissible thermal short-circuit ( IEC 60949 ) <i>Current for 1.0 sec.</i>		
Phase conductor 90 → 250°C	kA	34.8
Metallic screen 80 → 350°C	kA	10.5
<b>AMPACITY (***) – Bonding of the metallic screens</b>		<b>Single-point / Both-ends</b>
in earth		
<input type="checkbox"/> flat formation (*)	A	576 / 514
<input type="checkbox"/> trefoil formation	A	545 / 529
in air		
<input type="checkbox"/> flat formation	A	727 / 654
<input type="checkbox"/> trefoil formation	A	634 / 620
<b>TESTS</b>		
Test voltage – ( 2.5U <sub>0</sub> ; 30min)	kV	120
Partial discharge test	kV	60

**Marking: TF-KABLE 5 2XS(FL)2Y 1x240RM/50 40/69kV IEC 60840 2017**


(\*) Distance between cable axes laid in flat formation D<sub>c</sub>+D<sub>c</sub> mm

(\*\*\*) Current rating guideline (Calculated with Cymcap 7.2 based on IEC Pub. 60287 and the following conditions)


- Ground temperature      20°C
- Laying depth                1.0 m
- Ground thermal resistivity 1.0 K · m/W
- Air temperature             35°C

<sup>(s)</sup> Diameters are calculated values and subject to manufacturing tolerances

Cables in earth - Single point  
Ampacity 576A

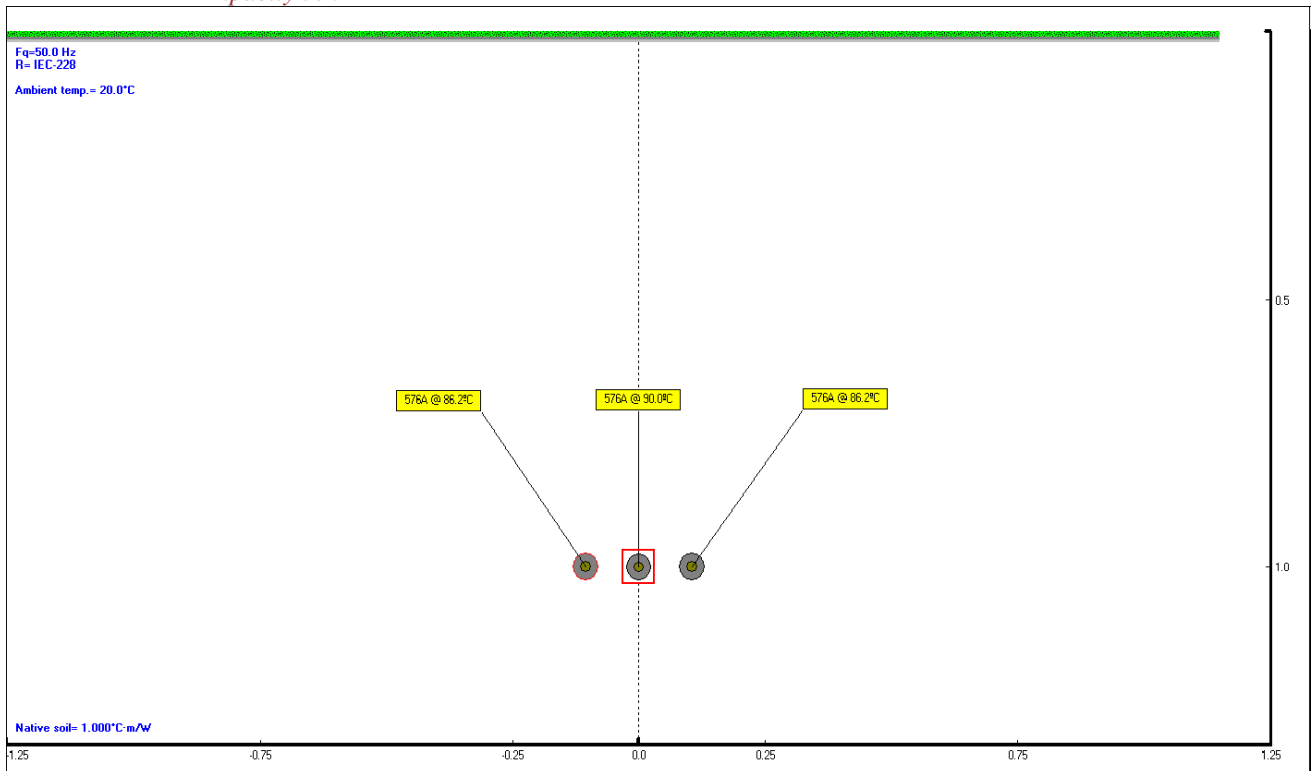

Ampacity 545A

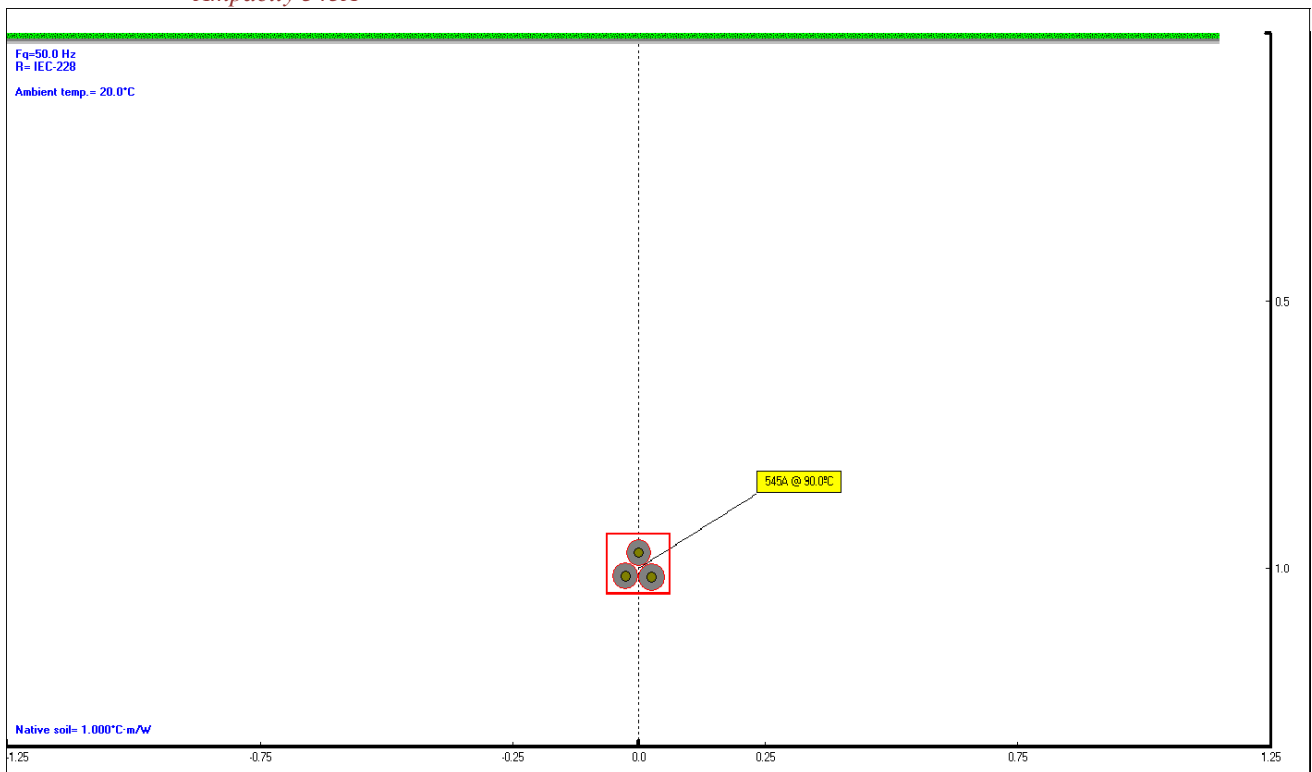

Date: 2017-04-26; Mp17087  
Prepared by: Michał Pstrągowski

<sup>(s)</sup> Diameters are calculated values and subject to manufacturing tolerances