

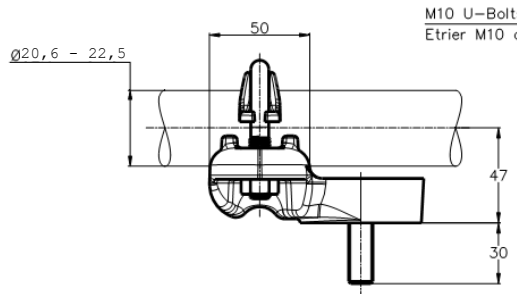


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWI	APVD
A		CREATION	20-NOV-17	BH	-

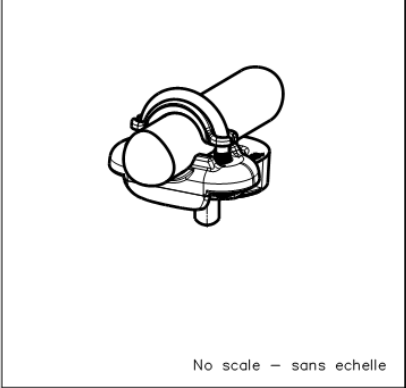

M10 U-Bolts stainless steel A4: 37Nm
 Etrier M10 acier inoxydable A4: 37Nm



M16 Stainless steel screw; Head screw is locked
 Vis M16 acier inoxydable: blocage en rotation de la tête de vis



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWI	20-Nov-17		TE Connectivity
		CHK	-		
DIMENSIONS: mm		APVD	-		NAME Single conductor support on BPI Support de câble sur ISO 5 CS 84 M16 S225
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	108-69096-001		
	Ø PLC ± -	APPLICATION SPEC	-		SIZE A3
	1 PLC ± -				
	2 PLC ± -				CAGE CODE -
	3 PLC ± -				
4 PLC ± -				DRAWING NO C=2327962	
ANGLES ± -					
MATERIAL	FINISH	APPROX. WEIGHT	0.7 kg		RESTRICTED TO
-	-	CUSTOMER DRAWING		SCALE	1/2
				SHEET	1 of 1
				REV	A

ITEM:.....