

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


-,-

© COPYRIGHT - By -


ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	CREATION	02-APR-21	MP	-

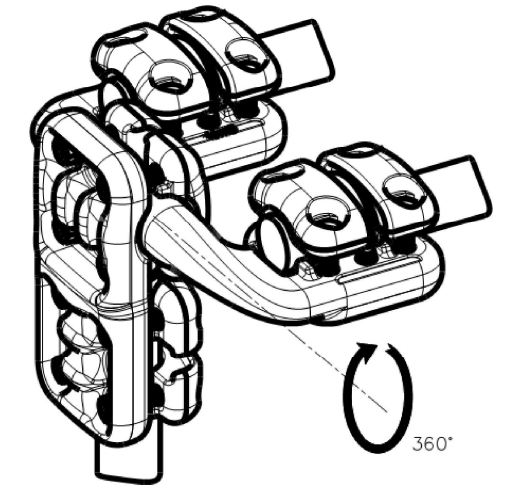


No scale  
Sans échelle

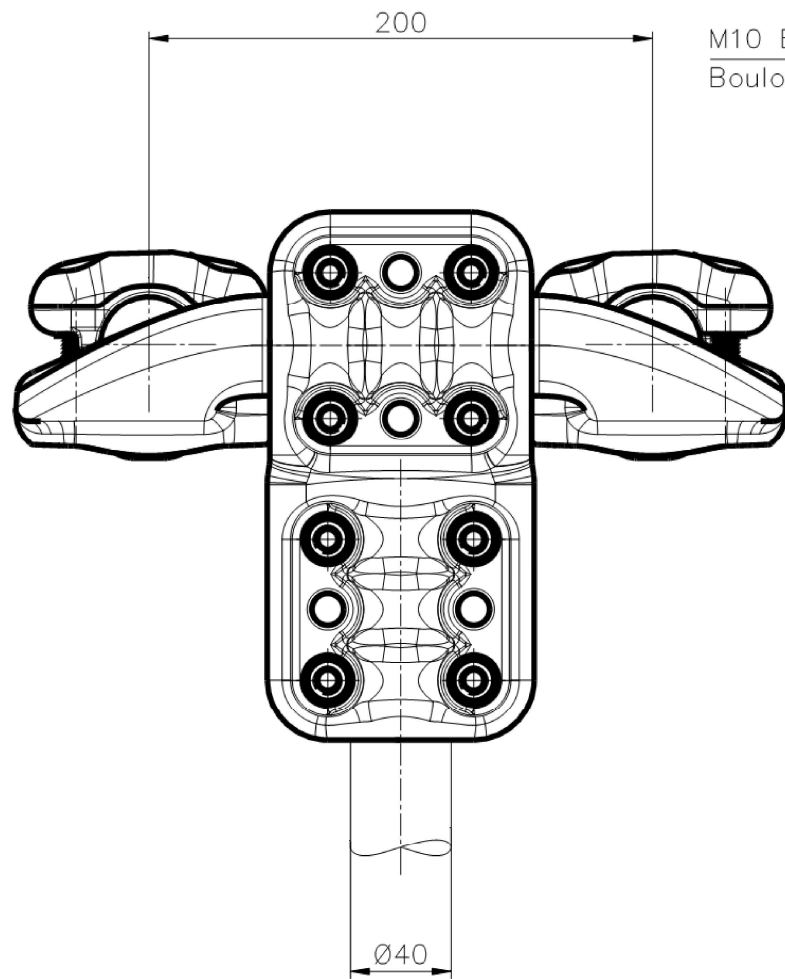

M10 Bolts stainless steel A2: 37Nm  
 Boulons M10 acier inoxydable A2: 37Nm

Ø32.6 - 34.5

Adjustable on site\*  
 Ajustable sur site

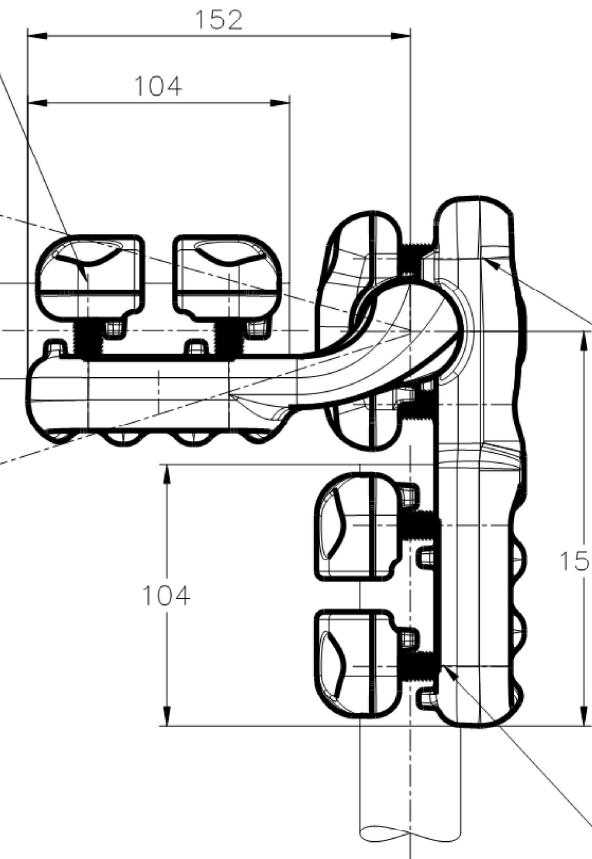

M10 Bolts stainless steel A4: 37Nm \*  
 Boulons M10 acier inoxydable A4: 37Nm

M10 Bolts stainless steel A4: 37Nm  
 Boulons M10 acier inoxydable A4: 37Nm

\*  
 In case of loosening, contact surfaces must be cleaned and greased  
 Refer to installation instruction

En cas de desserrage, les surfaces de contact doivent être nettoyées et graissées  
 Se référer à la notice d'installation

ITEM:.....

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	02-APR-21	<b>STE</b> TE Connectivity	
		CHK	-		
DIMENSIONS: mm		APVD	-	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	108-69096-001	ADJUSTABLE CONNECTOR TWIN CONDUCTORS TO STUD	
0 PLC ± -		APPLICATION SPEC	-	RACCORD AJUSTABLE FAISCEAU DOUBLE SUR BORNE	
1 PLC ± -				5 CTA 82 F M345 E200 M405	
2 PLC ± -		APPROX.WEIGHT	3.5 kg	SIZE	A3
3 PLC ± -		CUSTOMER DRAWING		CAGE CODE	00779
4 PLC ± -				DRAWING NO	C=2389691
ANGLES ± -				RESTRICTED TO	-
MATERIAL	FINISH			SCALE	1:3
-	-			SHEET	1 of 1
				REV	A