


TECHNICAL SPECIFICATION
A2XS(FL)2Y 1x240RM/95 76/132 (145)kV IEC 60840

CONSTRUCTION ^(x)

- Round, stranded and compressed aluminum conductor. Class 2.
- Extruded semi-conducting conductor screen
- Insulation XLPE – dry cured
- Extruded semi-conducting insulation screen
- Semi-conducting swelling tapes
- Metallic screen:
copper wire screen and copper equalizing tapes
- Semi-conducting swelling tapes
- Longitudinal aluminum foil
- Sheath – Black HDPE ST7

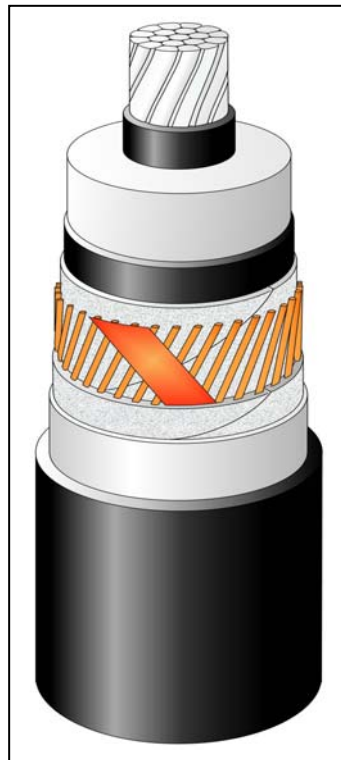

The picture is informative only
– not in scale

APPLICATION

- Laying in ground (wet or dry locations)
- Laying in air
- Laying in ducts

Highest permissible conductor temperature

- Continuous operation 90°C
- Overload 105°C
- Short circuit 250°C (duration max 5 s)

Laying is possible without any special measures at natural cable temperatures and ambient temperature not lower than -5°C, with Tele-Fonika supervising

MARKING

TF KABLE, product name, year of manufacture, standard, meter marking

DESCRIPTION	UNIT	DETAILS	
CONSTRUCTION DATA	U_o/U/U_m	76/132 (145)kV	
Conductor		Aluminum	
<input type="checkbox"/> material		34	
<input type="checkbox"/> number of wires	No	240	
Nominal cross sectional area	mm ²	17.9 ^{+0.1}	
Conductor diameter and tolerance	mm	0.6 / 1.0	
Min./Nom. thickness semi-conducting XLPE on conductor	mm	16.0	
Nominal insulation thickness XLPE	mm	14.4	
Insulation thickness: minimum at a point	mm	51.9	
Diameter over insulation – nominal	mm	0.6 / 1.0	
Min./Nom. thickness semi-conducting XLPE on insulation	mm	2 x ~ 0.35	
Thickness of semi-conducting swelling tape	No x mm	95	
Metallic screen	mm ²	60 x 1.44	
<input type="checkbox"/> Copper wires	No x mm	2 x 10 x 0.18	
<input type="checkbox"/> Copper equalizing tapes	No x mm x mm	57.5	
Mean diameter over metallic screen	mm	1 x ~ 0.35	
Thickness of semi-conducting swelling tape	No x mm	0.2	
Thickness of aluminum foil	mm	59.2	
Diameter over aluminum foil	mm	3.1 / 2.53	
Nominal outer sheath thickness / min	mm	(D _c)	
Approximate overall diameter completed cable	mm	65.5	
Weight of complete cable (approx.)	kg/km	4390	
DELIVERY DATA			
Diameter of wooden drum	m	3.0	
<input type="checkbox"/> type		30	
Length per drum	m	880	1000
Weight of heaviest reel, including cable	kg	5700	6200

^(x) Diameters are calculated values and subject to manufacturing tolerances

ELECTRICAL DATA at 50Hz		
Maximum D.C. conductor resistance at 20°C	Ω/km	0.1250
Maximum A.C. conductor resistance at 90°C	Ω/km	0.1610
Maximum D.C. metallic screen resistance at 20°C	Ω/km	0.188
Maximum D.C. aluminum foil resistance at 20°C	Ω/km	0.690
Operating inductance		
<input type="checkbox"/> trefoil formation	mH/km	0.451
<input type="checkbox"/> flat formation (*)	mH/km	0.636
Induction reactance		
<input type="checkbox"/> trefoil formation	Ω/km	0.142
<input type="checkbox"/> flat formation (*)	Ω/km	0.200
Capacitance	μF/km	0.140 (+ 8 %)
Capacitance reactance	kΩ/km	22.88
Impedance		
<input type="checkbox"/> trefoil formation	Ω/km	0.214
<input type="checkbox"/> flat formation (*)	Ω/km	0.256
Zero sequence reactance	Ω/km	0.090
Max. electric stress at conductor screen / (at insulation)	kV/mm	7.95 / 3.15
Dielectric losses (tg δ = 0.001) – per phase	W/m	0.252
Partial discharge test – at 1.5U ₀	pC	≤ 5
Charging current – per phase	A/km	3.32
Charging power	kVA/km	252
Earth fault current – per phase	A/km	9.96
MECHANICAL DATA		
Recommended min. bending radius for laying	m	1.65
Recommended permissible bending radius at final installation	m	1.32
Maximum permissible pulling force:	kN	7.2
SHORT CIRCUIT CURRENTS		
Maximum permissible thermal short-circuit (IEC 60949) <i>Current for 1.0 sec.</i>		
Phase conductor 90 → 250°C	kA	23.0
Metallic screen 80 → 350°C	kA	19.2
AMPACITY (**) – Bonding of the metallic screens		Single-point / Both-ends
in earth		
<input type="checkbox"/> flat formation (*)	A	444 / 402
<input type="checkbox"/> trefoil formation	A	423 / 411
in air		
<input type="checkbox"/> flat formation	A	550 / 511
<input type="checkbox"/> trefoil formation	A	493 / 483
TESTS		
AC – test voltage – (2,5U ₀ ; 30min)	kV	190
Impulse voltage	kV	650
Partial discharge test	kV	114

Marking: TF-KABLE 5 A2XS(FL)2Y 1x240RM/95 76/132kV IEC 60840 2014



(*) Distance between cable axes laid in flat formation D_e+D_e mm (*for information*)

(**) Current rating guideline (Calculated with Cymcap 5.3 based on IEC Pub. 60287 and the following conditions)

- Ground temperature 20°C
- Laying depth 1.0 m
- Ground thermal resistivity 1.0 K · m/W
- Air temperature 35°C



(³) Diameters are calculated values and subject to manufacturing tolerances

Cables in earth – single point or cross-bonded

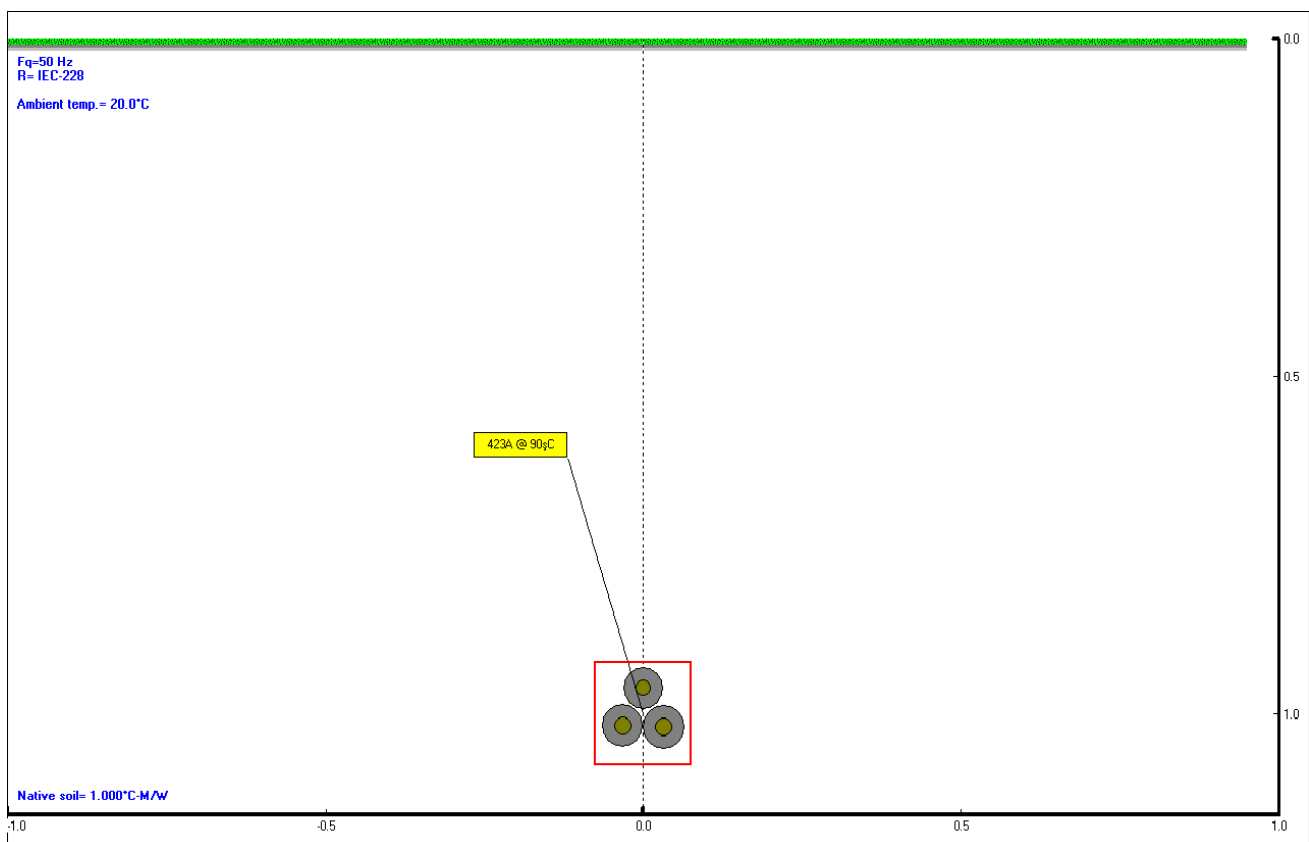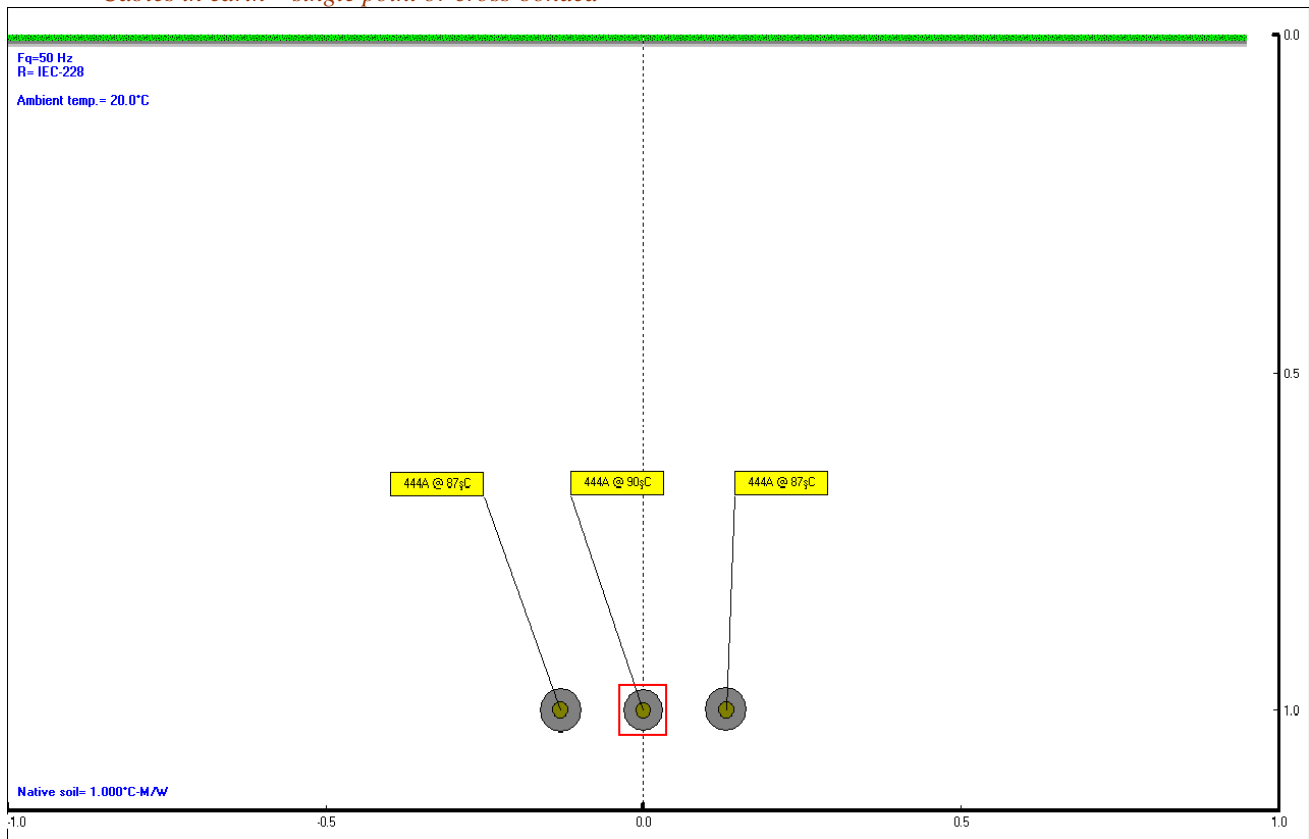

^(s) Diameters are calculated values and subject to manufacturing tolerances

Cables in air – single point or cross-bonded

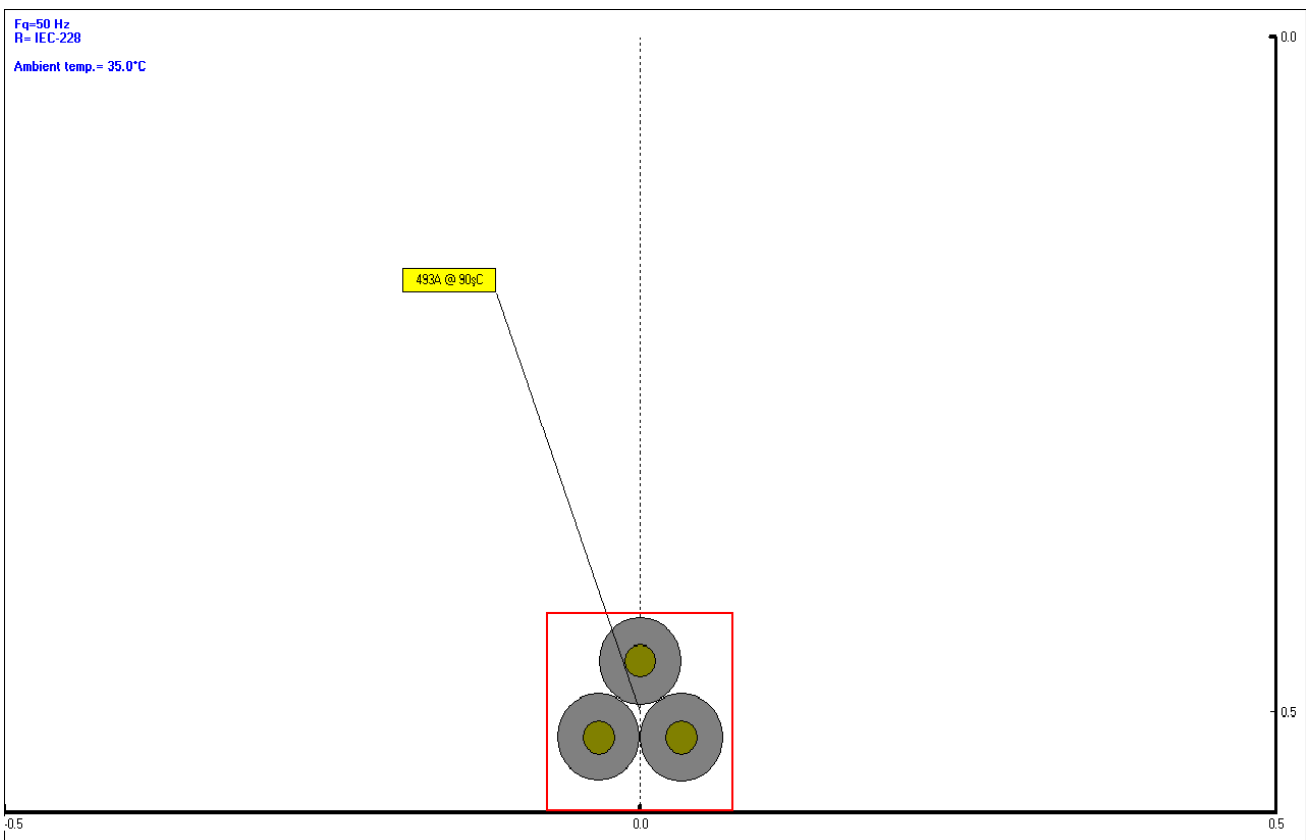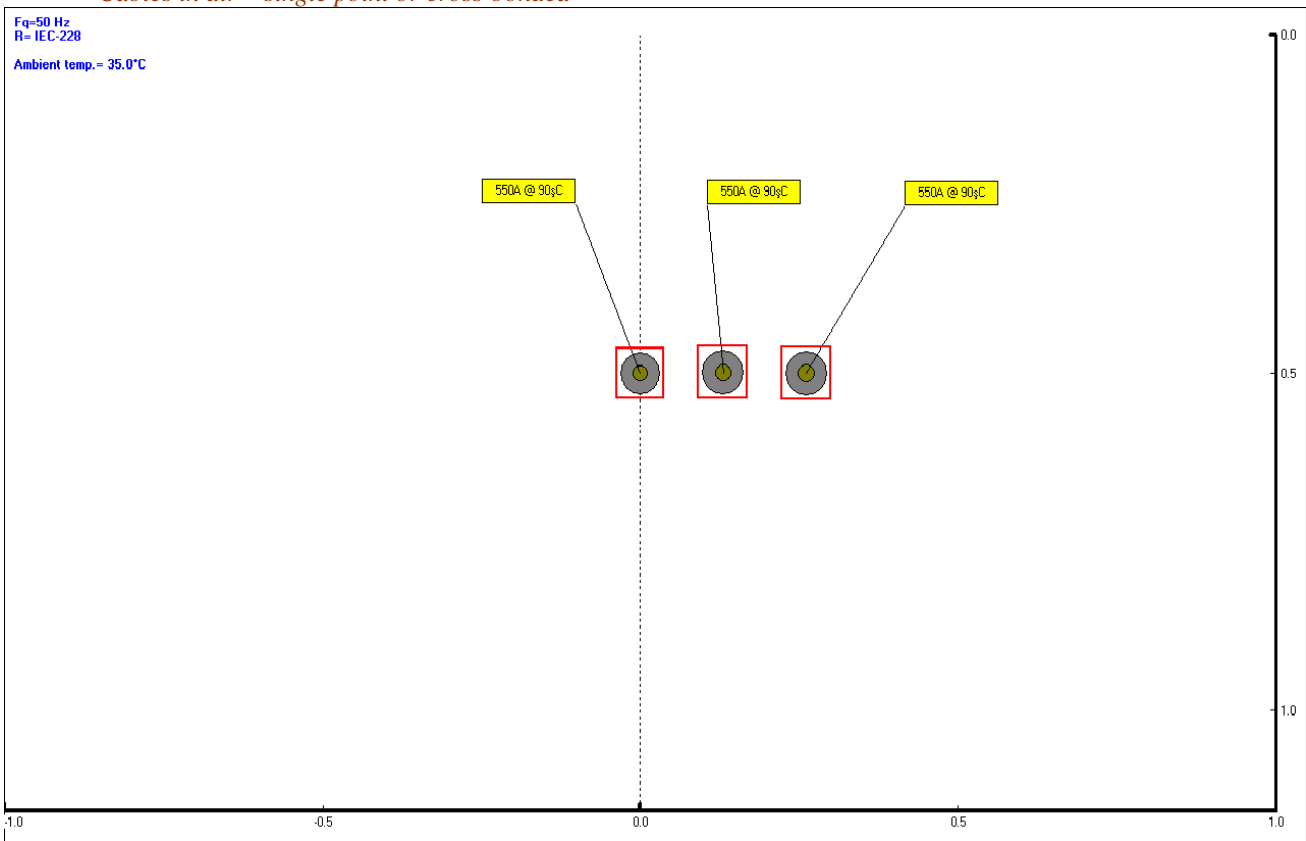

Date: 2014-12-11; Mp14252
Prepared by: Michał Pstragowski

^(s) Diameters are calculated values and subject to manufacturing tolerances