


TECHNICAL SPECIFICATION

A2XS(FL)2Y-SC 1x300RM/95 76/132 (145)kV IEC 60840

CONSTRUCTION ^(x)

- Round, stranded and compacted aluminum conductor. Class 2
- Extruded semi-conducting conductor screen
- Insulation XLPE – dry cured
- Extruded semi-conducting insulation screen
- Semi-conducting swelling tapes
- Metallic screen:
 - copper wires screen and
 - copper equalizing tapes
- Semi-conducting swelling tapes
- Longitudinal aluminum foil
- Sheath – Natural HDPE
- Extruded semi-conducting coated

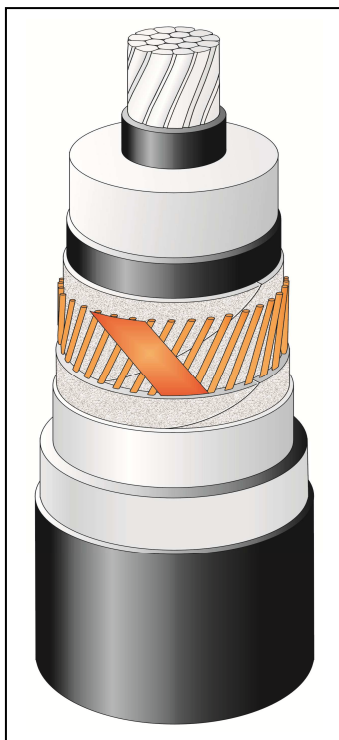

The picture is informative only
– not in scale

APPLICATION

- Laying in ground
(wet or dry locations)
- Laying in air
- Laying in ducts

Highest permissible conductor temperature

- Continuous operation 90 °C
- Overload 105 °C
- Short circuit 250 °C
(duration max 5 s)

Laying is possible without any special measures at natural cable temperatures and ambient temperature not lower than -5°C, with Tele-Fonika supervising

MARKING

TF KABLE, product name, date of manufacture, standard, meter marking

DESCRIPTION	UNIT	DETAILS	
CONSTRUCTION DATA		76 / 132 (145)kV	
Conductor		Aluminum	
<input type="checkbox"/> Material			
<input type="checkbox"/> Number of wires	No	34	
Nominal cross sectional area	mm ²	300	
Conductor diameter and tolerance	mm	20.0 ^{+0.3}	
Min./Nom. thickness semi-conducting XLPE on conductor	mm	0.8 / 1.2	
Insulation thickness XLPE – nominal value	mm	16.5	
Insulation thickness: minimum at a point	mm	14.85	
Diameter over insulation – nominal	mm	55.4 ^{+0.5}	
Min./Nom. thickness semi-conducting XLPE on insulation	mm	0.6 / 1.0	
Thickness of semi-conducting swelling tape	No x mm	2 x ~ 0.35	
Metallic screen	mm ²	95	
<input type="checkbox"/> Copper wires	No x mm	60 x 1.44	
<input type="checkbox"/> Copper equalizing tape	No x mm x mm	2 x 10 x 0.18	
Mean diameter over metallic screen	mm	61.2	
Thickness of semi-conducting swelling tape	No x mm	2 x ~ 0.35	
Thickness of aluminum foil	mm	0.15	
Nominal outer sheath thickness / min.	mm	3.2 / 2.62	
Thickness of extruded semi-conducting coated	mm	~ 0.5	
Approximate overall diameter completed cable (D _c)	mm	70.3	
Weight of complete cable (approx.)	kg/km	4940	
DELIVERY DATA			
Diameter of wooden drum	m	2.8	3.2
<input type="checkbox"/> type		28	32
Maximum length per drum	m	710	1440
Weight of heaviest reel, including cable	kg	5100	9300

^(x) Diameters are calculated values and subject to manufacturing tolerances

ELECTRICAL DATA at 50Hz		
Maximum D.C. conductor resistance at 20 °C	Ω/km	0.1
Maximum A.C. conductor resistance at 90 °C	Ω/km	0.129
Maximum D.C. metallic screen resistance at 20 °C	Ω/km	0.189
Maximum D.C. aluminum foil resistance at 20 °C	Ω/km	0.876
Operating inductance		
<input type="checkbox"/> trefoil formation	mH/km	0.44
<input type="checkbox"/> flat formation ^(*)	mH/km	0.625
Induction reactance		
<input type="checkbox"/> trefoil formation	Ω/km	0.138
<input type="checkbox"/> flat formation ^(*)	Ω/km	0.196
Capacitance	μF/km	0.147 (+ 8 %)
Capacitance reactance	kΩ/km	21.62
Impedance		
<input type="checkbox"/> trefoil formation	Ω/km	0.189
<input type="checkbox"/> flat formation ^(*)	Ω/km	0.235
Zero sequence reactance	Ω/km	0.085
Max. electric stress at conductor screen / (at insulation)	kV/mm	7.49 / 3.03
Dielectric losses (tg δ = 0.001) – per phase	W/m	0.267
Partial discharge test – at 1.5U ₀	pC	≤ 5
Charging current – per phase	A/km	3.52
Charging power	kVA/km	267
Earth fault current – per phase	A/km	10.55
MECHANICAL DATA		
Recommended min. bending radius for laying	m	1.76
Recommended permissible bending radius at final installation	m	1.41
Maximum permissible pulling force:	kN	9
SHORT CIRCUIT CURRENTS		
Maximum permissible thermal short-circuit Current for 1.0 sec. (IEC 60949)		
Phase conductor 90 → 250 °C	kA	28.8
Metallic screen 80 → 350 °C	kA	19.5
AMPACITY^(**) – Bonding of the metallic screens		Single-point / Both-ends
in earth		
<input type="checkbox"/> flat formation ^(*)	A	500 / 450
<input type="checkbox"/> trefoil formation	A	475 / 465
in air		
<input type="checkbox"/> flat formation	A	630 / 580
<input type="checkbox"/> trefoil formation	A	560 / 550
TESTS		
AC Test voltage – (2.5U ₀ ; 30min)	kV	190
Partial discharge test	kV	114

Marking: TF-KABLE 5 A2XS(FL)2Y-SC 1x300RM/95 76/132kV IEC 60840 2018

^(*) Distance between cable axes laid in flat formation D_e+D_e mm

^(**) Current rating guideline (Calculated with Cymcap 7.2 based on IEC Pub. 60287 and the following conditions)

- Ground temperature 20 °C
- Laying depth 1.0 m
- Ground thermal resistivity 1.0 K · m/W
- Load factor 1.0
- Air temperature 35 °C

Date: 2018-04-11; MK18070

Prepared by: Marcin Kocik

^(s) Diameters are calculated values and subject to manufacturing tolerances